



Cloudbass OB15 - Standard Operational Layout

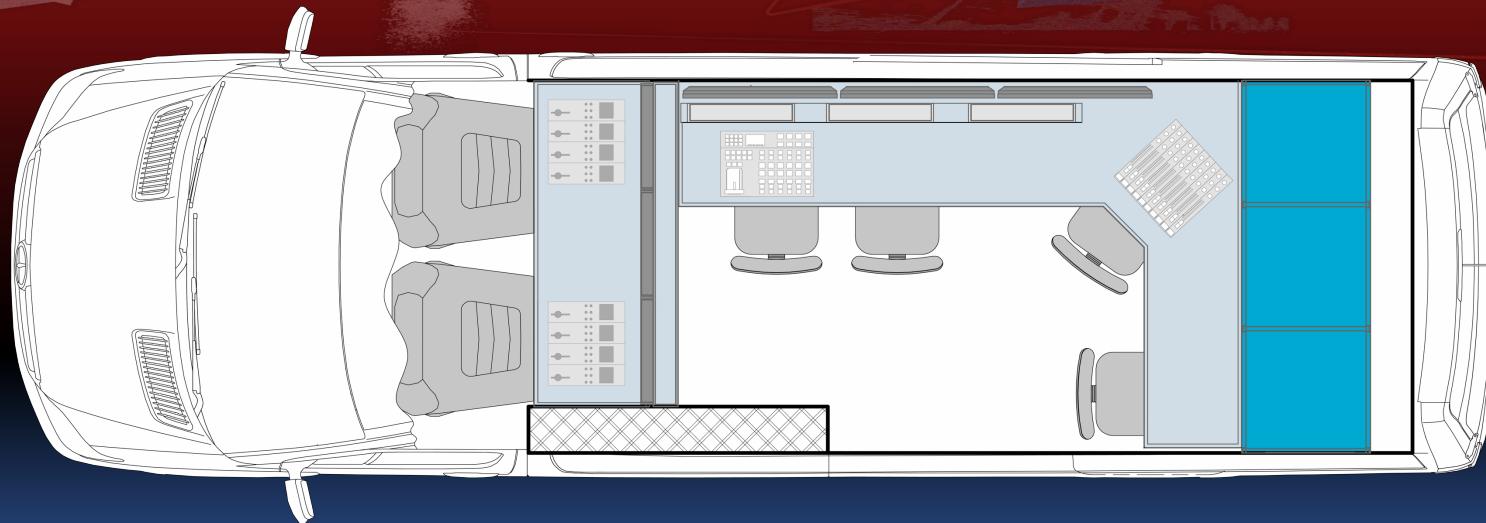



Cloudbass OB15 - Compact Broadcast Capability

cloudbass
outside broadcast

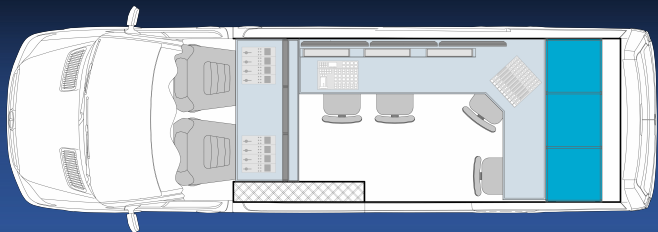

Cloudbass OB15 - Combined with CBGAL3

cloudbass
outside broadcast

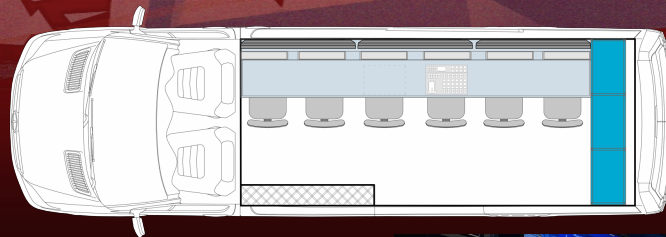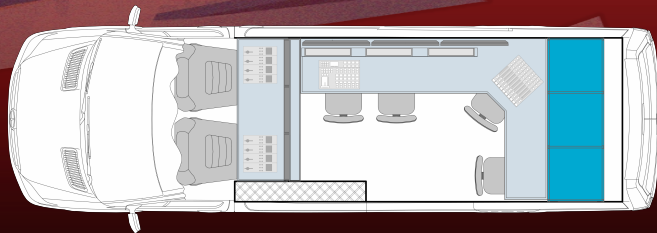

Cloudbass OB15 - Truck Specifications



Audio Console:	2 x X32 S16 Stageboxes via singlemode fibre
Communications:	Telex ODIN Communications System. DANTE Integration 2x UHF Base Stations
Routing:	Ross Ultrix 72x72 UHD 12G
Signal Conversion:	Ross / Blackmagic
Vision Mixer:	Ross Carbonite 1080i50 / 1080P50 / UHD 2x ME Bank Surface.
Racking & Cameras:	3x Racks Positions for 12 Cameras, JVC / Blackmagic Racking Monitors Tektronix Scopes
Multiviewers:	Low Latency Multiviewers – Ross Ultrix with 10 Heads
Monitor Stack:	2 x Sony 40" Monitors
Power:	1 x 32A 1Ø – Fully UPS'd – 15min Redundancy

Cloudbass OB15 - Truck Dimensions

